



## Niagara Flapperless<sup>®</sup> Toilet

1.6 GPF (6.0 LPF)

- Fill time at 28 seconds
- Gravity flush system
- Flapperless flush tank with Fluidmaster<sup>®</sup> fill valve
- Available with a round or elongated bowl
- 725g MaP score\*
- Adjustable 10–12" rough-in
- 10-year limited warranty

WATER 



**NIAGARA**  
CONSERVATION<sup>®</sup>



## Niagara Flapperless® Toilet


1.6 GPF (6.0 LPF)

The Niagara Flapperless® toilet features a revolutionary tip-bucket technology, creating a high-performance flush using 1.6 gallons per flush.

- 1.6 gallon per flush (6.0 LPF)
- 40psi inlet water pressure with fill time at approximately 28 seconds
- Flapperless tank with Fluidmaster® fill valve
- Gravity flush with a tip-bucket technology
- MaP Score: 725g (round) 400g (elongated)
- Sweat-free tank
- Fully glazed trapway, 2" (51 mm)
- Adjustable 10–12" rough-in
- Floor mounted, floor outlet
- Opposable handle positioning
- Elongated model meets ADA standard, 17" height with seat
- Oversized tank and footprint to cover unsightly wall or floor exposure
- Maintenance-free, leak-free, no double-flushing
- 10-year limited warranty on Niagara parts

**Certification:** ASME A112.19.2 / CSA B45.1

### N2226/N2216T Elongated Bowl Specs

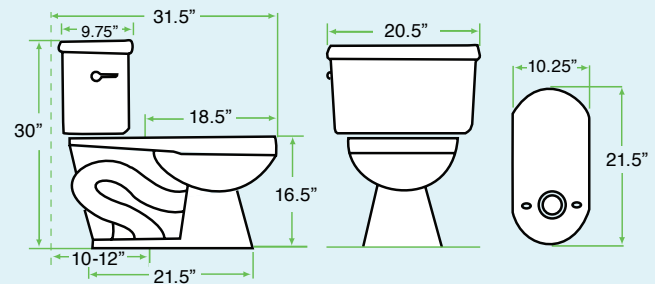

### N2216/N2216T Round Bowl Specs

